

The Reactive Synthesis Competition (SYNTCOMP): 2018–2021

Swen Jacobs^{1*}, Guillermo A. Pérez^{2*}, Remco Abraham³, Véronique Bruyère⁴, Michaël Cadilhac⁵, Maximilien Colange⁶, Charly Delfosse⁴, Tom van Dijk³, Alexandre Duret-Lutz⁶, Peter Faymonville⁷, Bernd Finkbeiner¹, Ayrat Khalimov⁸, Felix Klein⁷, Michael Luttenberger⁹, Klara Meyer⁹, Thibaud Michaud⁶, Adrien Pommellet⁶, Florian Renkin⁶, Philipp Schlehuber-Caissier⁶, Mouhammad Sakr¹⁰, Salomon Sickert⁹, Gaëtan Staquet⁴, Clément Tamines⁴, Leander Tentrup⁷ and Adam Walker

¹CISPA Helmholtz Center for Information Security, Stuhlsatzenhaus 5, Saarbrücken, 66123, Germany.

²University of Antwerp – Flanders Make, Middelheimlaan 1, Antwerpen, 2020, Belgium.

³University of Twente, The Netherlands.

⁴University of Mons, Belgium.

⁵DePaul University, USA.

⁶Laboratoire de Recherche et Développement de l'Epita, France.

⁷Saarland University Germany.

⁸Université libre de Bruxelles, Belgium.

⁹Technische Universität München, Germany.

¹⁰University of Luxembourg, Luxembourg.

*Corresponding author(s). E-mail(s): jacobs@cispa.de; guillermo.perez@uantwerp.be;

Abstract

We report on the last four editions of the reactive synthesis competition (SYNTCOMP 2018–2021). We briefly describe the evaluation scheme and the experimental setup of SYNTCOMP. Then, we introduce new benchmark classes that have been added to the SYNTCOMP library and give an overview of the participants of SYNTCOMP. Finally, we present and analyze the results of our experimental evaluations, including a ranking of tools with respect to quantity and quality of solutions.

Keywords: Reactive synthesis, algorithmic verification, zero-sum games

1 Introduction

Reactive systems are systems that maintain a continuous interaction with their environment. The act of automatically constructing such a system

from a given formal specification (or determining that no such system exists) is called *reactive synthesis*. The current definition of reactive synthesis is usually attributed to Alonzo Church ([Church](#),

1957, 1964). In the last 60 years, several works have laid the theoretical foundations that underpin all current synthesis algorithms for different instantiations of reactive synthesis. Indeed, depending on the format in which a specification for the reactive system is formalized, different synthesis problems arise.

Reactive synthesis has the potential to revolutionize the way in which reactive systems are designed. This is due to the fact that a synthesized system is correct by construction and therefore does not need to be tested nor verified for correctness. Despite its potential, industry has not yet adopted it nor the prototype tools implemented by academic researchers. This is in contrast to other formal verification techniques such as model checking (Baier and Katoen, 2008; Clarke et al, 2018). With an aim at increasing the impact of reactive synthesis in industry and improve the quality of synthesis tools, the Reactive Synthesis competition (SYNTCOMP) was founded in 2014 (Jacobs et al, 2017b). In short, the competition is designed to foster research into well-engineered, scalable, and user-friendly synthesis tools. To realize this, the competition organizers have proposed standards for benchmark formats, and maintain a library of benchmarks with entries that remain challenging for state-of-the-art tools. Most importantly, SYNTCOMP provides a dedicated and independent platform for the objective comparison of synthesis tools.

SYNTCOMP has become an annual event associated with the International Conference on Computer Aided Verification (CAV) and the Workshop on Synthesis (SYNT). The organization team of competition has changed slightly from its inception: In 2019, Guillermo A. Pérez joined the organization team and, since 2020, the competition has an advisory committee that presently consists of Roderick Bloem, Armin Biere, Salomon Sickert, Jean-François Raskin, Bernd Finkbeiner, and Ayrat Khalimov. In terms of specification formats, the competition currently has three of them: one for safety specifications defined by monitoring circuits, one for linear-temporal logic specifications, and one for parity-game specifications. The last one, i.e. parity games, is the most recent addition.

In this article we present the list of benchmark families that have been added to the competition from 2018 to 2021 as well as the tools which

participated in the competition during the same years. Finally, we also highlight the most interesting experimental results from these editions of the competition and discuss the progress of synthesis tools observed in this time.

2 Setup, Rules, and Execution

We begin this section with a reminder on the foundations of the synthesis problem.

2.1 Synthesis and realizability

An *infinite word* α over an *alphabet* A , i.e. $\alpha \in A^\omega$, can be seen as a function $\alpha: \mathbb{N}_{>0} \rightarrow A$. Thus, we write $\alpha(i)$ to refer to the i -th letter of α .

Definition 1 (Infinite-word automata). *An (ω -word) automaton is a tuple $\mathcal{N} = (Q, q_0, A, \Delta)$ where Q is a finite set of states, $q_0 \in Q$ is the initial state, A is a finite alphabet, and $\Delta \subseteq Q \times A \times Q$ is the transition relation. We assume that for all $p \in Q$ and all $a \in A$ there exists $q \in Q$ such that $(p, a, q) \in \Delta$.*

The automaton is said to be *deterministic* if for all $p \in Q$ and all $a \in A$ we have that $(p, a, q_1), (p, a, q_2) \in \Delta$ implies $q_1 = q_2$. A *run* of \mathcal{N} on a word $\alpha \in A^\omega$ is an infinite sequence $\rho = q_0 \alpha(1) q_1 \alpha(2) \dots \in (Q \cdot A)^\omega$ such that $(q_i, \alpha(i+1), q_{i+1}) \in \Delta$ for all $i \in \mathbb{N}$.

Automata are paired with a condition that determines which runs are *accepting*. For the competition, we consider four such *acceptance conditions*.

- The *safety* condition is defined with respect to a set $U \subseteq Q$ of *unsafe states*. A run $\rho = q_0 a_1 q_1 a_2 \dots$ is accepting for this condition, or safe, if and only if for all $i \in \mathbb{N}$ we have that $q_i \notin U$.
- The *Büchi* condition is defined with respect to a set of *Büchi states* $B \subseteq Q$. A run $\rho = q_0 a_1 q_1 a_2 \dots$ is accepting for this condition if and only if for all $i \in \mathbb{N}$ there exists $j \geq i$ such that $q_j \in B$. That is, the run visits Büchi states infinitely often.
- The *co-Büchi* condition is also defined with respect to the set $B \subseteq Q$ of states. A run $\rho = q_0 a_1 q_1 a_2 \dots$ is accepting for the condition if and only if there exists $i \in \mathbb{N}$ such that for all $j \geq i$ we have that $q_j \notin B$.

- The *parity* condition is defined with respect to a *priority function* $p: Q \rightarrow \mathbb{N}$. A run $\rho = q_0 a_1 q_1 a_2 \dots$ is accepting for the parity condition if and only if the value $\liminf_{i \rightarrow \infty} p(q_i)$ is even. That is, the smallest priority that appears infinitely often along the run is even.

A word α is accepted by an automaton \mathcal{N} if it has a run on α that is accepting. In the sequel, it will sometimes be useful to consider *universal automata*. Such an automaton \mathcal{N} accepts a word α if all its runs on α are accepting.

We denote by $\mathcal{L}(\mathcal{N})$ the *language* of the automaton \mathcal{N} , that is, the set of words that \mathcal{N} accepts.

2.1.1 Synthesis games and strategies

Definition 2 (Games). *A (Gale-Stewart) game on input and output alphabets I and O , respectively, is a two-player perfect-information game played by Eve and Adam in rounds: Adam chooses an element $i_k \in I$ and Eve responds with an element $o_k \in O$. A play in such a game is an infinite word $\langle i_1, o_1 \rangle \langle i_2, o_2 \rangle \dots \in (I \times O)^\omega$.*

A game is paired with a *payoff set* $P \subseteq (I \times O)^\omega$ that determines who wins a play π . If $\pi \in P$ then π is *winning for Eve*, otherwise it is *winning for Adam*.

Definition 3 (Strategies). *A strategy for Adam is a function $\tau: (I \times O)^* \rightarrow I$ which maps every (possibly empty) play prefix to a choice of input letter. Similarly, a strategy for Eve is a function $\sigma: (I \times O)^* I \rightarrow O$ which maps every play prefix and input letter to a choice of output letter.*

A play $\pi = \langle i_1, o_1 \rangle \langle i_2, o_2 \rangle \dots$ is *consistent* with a strategy τ for Adam if $i_k = \tau(\langle i_1, o_1 \rangle \dots \langle i_{k-1}, o_{k-1} \rangle)$ for all $k \in \mathbb{N}$; it is consistent with a strategy σ for Eve if $o_k = \sigma(\langle i_1, o_1 \rangle \dots \langle i_{k-1}, o_{k-1} \rangle, i_k)$. A pair of strategies σ and τ for Eve and Adam, respectively, induces a unique play $\pi_{\sigma\tau}$ consistent with both σ and τ .

In a game with payoff set P , the strategy σ for Eve is a *winning strategy* if for all strategies τ for Adam it holds that $\pi_{\sigma\tau} \in P$; the strategy τ for Adam is winning if for all strategies σ for Eve we have $\pi_{\sigma\tau} \notin P$.

The realizability and synthesis problems are defined for games whose payoff sets are given as

the language of an automaton. We sometimes refer to these as *games played on automata*.

Definition 4 (Synthesis and realizability). *Consider finite input and output alphabets I and O , respectively, and an automaton \mathcal{N} with alphabet $I \times O$. The realizability problem asks whether there exists a winning strategy for Eve in the game with payoff set $\mathcal{L}(\mathcal{N})$. The synthesis problem further asks to compute and output such a strategy if one exists.*

2.1.2 Finite-memory strategies

A *finite-memory* strategy σ for Eve in a game played on the automaton $\mathcal{N} = (Q, q_0, I \times O, \Delta)$ with finite input and output alphabets I and O is a strategy that can be encoded as a (*deterministic*) *Mealy machine*, that is, a finite-state machine that outputs a letter from O when given a letter from I . Formally, such a machine is a tuple $\mathcal{M} = (S, s_0, I, \lambda_u, \lambda_o)$ where S is a finite set of (memory) states, s_0 is the initial state, $\lambda_u: S \times (Q \times I) \rightarrow S$ is the update function and $\lambda_o: S \times (Q \times I) \rightarrow O$ is the output function. The machine encodes σ in the following way. For all play prefixes $\langle i_1, o_1 \rangle \dots \langle i_{k-1}, o_{k-1} \rangle$ and input letters $i_k \in I$ we have that $\sigma(\langle i_1, o_1 \rangle \dots \langle i_{k-1}, o_{k-1} \rangle, i_k) = \lambda_o(s_k, i_k)$ where $s_{\ell+1} = \lambda_u(s_\ell, i_\ell)$ for all $\ell < k$. We then say the strategy σ has *memory* $|S|$. In particular, when $|S| = 1$, we say the strategy is *memoryless* (the term *positional* is also used in the literature). For all games considered in the competition, it holds that there exists a winning strategy for Eve in the game if and only if there exists a memoryless winning strategy for Eve.

2.2 Safety, parity, and linear-temporal specifications

Let I and O be finite input and output alphabets. SYNTCOMP has tracks corresponding to three different versions of the synthesis and realizability problems. The *safety tracks* correspond to these problems for games played on deterministic automata with a safety acceptance condition; the *parity tracks*, to the same problems for games played on deterministic automata with a parity acceptance condition. The remaining tracks correspond to games whose payoff set is given in the form of a *linear-temporal-logic* (LTL) formula. We

explain the connection between LTL formulas and infinite-word automata in the following.

2.2.1 LTL-defined payoff sets

LTL (Pnueli, 1977) is a logic that allows one to naturally specify time dependence among events that make up the formal specification of a system. Formulas in LTL are constructed from a set P of atomic propositions, the usual Boolean connectives, and temporal operators X, F, G, U which intuitively correspond to “next”, “eventually”, “always”, and “until” in English. Formally, LTL formulas conform to the following syntax:

$$\varphi ::= a \in P \mid \varphi \wedge \varphi \mid \neg\varphi \mid X\varphi \mid F\varphi \mid G\varphi \mid \varphi U \varphi$$

with derived operators such as implication defined as usual. For instance, the formula $G(req \rightarrow Fgrant)$, over atomic propositions req and $grant$, can be read as “it is always the case that if there is a request then eventually it is granted”. We refer the reader to the book by Baier and Katoen (2008) for the formal semantics of LTL. In the context of words over an input-output alphabet $I \times O$, the atomic propositions can be assumed to be an encoding of letters in the alphabet. That is, the truth value of the propositions is defined for each letter.

It is well known that the set $\text{Words}(\varphi)$ of all words satisfying a given LTL formula φ can be “compiled” into an infinite-word automaton. For instance, one can construct (in exponential time) an automaton \mathcal{N} with a Büchi acceptance condition such that $\mathcal{L}(\mathcal{N}) = \text{Words}(\varphi)$ (Vardi and Wolper, 1984). One can also construct (in doubly-exponential time) a deterministic automaton \mathcal{N} with a parity acceptance condition with the same property (Safra, 1988; Piterman, 2007). The *LTL tracks* of the competition correspond to synthesis and realizability problems that can be solved by playing games on a deterministic parity automaton compiled from a given LTL formula.

Note that, since the automaton is not explicitly given as input, algorithms for either problem might construct different automata. Furthermore, algorithms for both problems exist which avoid constructing a deterministic parity automaton altogether.

2.2.2 Specification formats

We now briefly touch on the encoding used by the competition to represent the input for the safety, parity, and LTL tracks.

Safety specifications. To represent deterministic automata with a safety acceptance condition, we use an extended version of the AIGER format (Biere, 2011). The latter is the standard format in the hardware model checking competition (Biere, 2007). The main reason that the basic format has to be extended is to allow for the partitioning of the alphabet into I and O (Jacobs, 2014).

Parity specifications. For automata with a parity acceptance condition, we use an extended version of the Hanoi Omega-Automata (HOA) format (Babiak et al, 2015). The HOA format is a flexible exchange format for infinite-word automata. Just like the AIGER format, extending it is necessary to be able to include the partitioning of alphabet into I and O (Pérez, 2019).

LTL specifications. Finally, to represent LTL specifications we use the Temporal Logic Synthesis Format (TLSF) (Jacobs et al, 2016). TLSF allows to define *families* of LTL specifications via parameters. Additionally, it allows to use high level constructs, such as sets and functions, to provide a compact and human-readable representation.

2.2.3 Output format

For the synthesis tracks, tools are expected to produce a strategy if the specification is realizable. AIGER is the format used by the competition to encode the Mealy machine implementing the strategy. In this case the standard AIGER format is sufficient.

2.3 Rules

All tracks are divided into subtracks for realizability checking and synthesis, and into two execution modes: sequential (using a single core of the CPU) and parallel (using up to 4 cores). Every tool can run in up to three configurations per subtrack and execution mode. Before the competition, all tools are tested on a small benchmark set, and authors can submit bugfixes if problems are found. Tools submitted by the organizers are not allowed to submit bugfixes.

2.3.1 Ranking schemes

In all tracks, there is a ranking based on the number of correctly solved problems within a 3600s timeout. In the synthesis tracks, correctness of the solution additionally has to be confirmed by a model checker. Additionally, in synthesis tracks there is a ranking based on the quality of the solution, measured by the number of gates in the produced AIGER circuit. To this end, the size of the solution is compared to the size r of a reference solution. A circuit of the same size is rewarded 2 points, and smaller or larger solutions are awarded more or less points, respectively (see, e.g. [Jacobs et al \(2017a\)](#), for more details).

2.3.2 Selection of benchmarks

In 2018, benchmarks were selected according to the same scheme as in previous years, based on a categorization into different classes. From 2019 onward, all available benchmarks were used. For TLSF-encoded families of benchmarks, more instances are generated whenever all the existing ones are considered “too easy” for more than one tool.

2.4 Execution

In 2018, SYNTCOMP was run at Saarland University. Benchmarking was again organized on the EDACC platform ([Balint et al, 2011](#)). Since 2019, the competition has been run on StarExec ([Stump et al, 2014](#)). This has had a few consequences. The main such consequence is that not all legacy tools were successfully migrated: some of them relied on deprecated packages while others were implemented in languages with limited compiler support. Furthermore, such tools lacked an active maintainer.

Our use of StarExec has significantly simplified the organizational effort, while admittedly raising the entry threshold for participants a bit, since they can, and must, themselves make sure that their code runs on the competition servers. For an up-to-date overview of the specifications of the StarExec service, we refer the reader to its website ¹ and wiki.²

¹<https://www.starexec.org/>

²<https://wiki.uiowa.edu/display/stardev/User+Guide>

3 Benchmarks

We shortly comment on families of benchmarks that were added to each one of the tracks during the relevant years.

3.1 LTL

Between 2018 and 2019, several *temporal-stream logic* (TSL) benchmarks were submitted to the LTL tracks of SYNTCOMP. TSL is a new temporal logic that allows to separate control and data ([Finkbeiner et al, 2019b](#)). Among others, the logic can be used to specify components of games implemented for FPGAs ([Geier et al, 2019](#)) and to specify functional reactive programs ([Finkbeiner et al, 2019a](#)). Importantly, bounded TSL specifications can be translated into LTL specifications — this is how the benchmarks are obtained.

In addition to the TSL benchmarks, Felix Klein also submitted LTL benchmarks based on hardware-component specifications and an encoding of an “infinite duration tic-tac-toe”. In 2020 and 2021, TLSF files encoding families of LTL specifications were used to generate more challenging benchmarks, i.e., larger parameter values were used to generate more difficult instances of each family to gauge how well tools scale w.r.t. the parameters.

3.2 Safety

In 2019, random examples were systematically generated by Mouhammad Sakr by uniformly sampling from the set of all specifications with given values for the number of (un)controllable inputs and latches. The techniques used for this were subsequently improved and described by [Jacobs and Sakr \(2021\)](#).

3.3 Parity games

In 2020, Spot ([Duret-Lutz et al, 2016](#)) was used to generate deterministic parity automata from some LTL benchmarks. It is important to mention that, perhaps because this translation is doubly exponential in general, not many specifications could be translated. Furthermore, the ones that did yield a deterministic parity automaton resulted in small ones. In 2021, combinatorially hard benchmarks were generated using the PGSolver parity-game

suite (Friedmann and Lange, 2009) and then translated to the extended HOA format.

4 Active participants

In this section we give an overview of the participants of the 2018–2021 editions of SYNTCOMP. We mostly focus on the participants of the parity and LTL tracks. The safety track had minimal active participation: in 2018, the only tool that received an update was Simple BDD Solver, and the only new tool was LazySynt, which participated hors concours. No updates or new tools were submitted to the safety track after 2018.

Some of the tool descriptions below may refer to specialized techniques. We refer the interested reader to the publications cited in the text further details on such techniques.

4.1 Strix

Strix is a tool for LTL synthesis using transition-based deterministic parity automata (tDPW) and parity games as intermediate steps. Since its inception (Meyer et al, 2018), it proceeds in four stages: 1) Formula Rewriting and Decomposition, 2) Automaton Construction, 3) Winning Strategy Computation, and 4) Controller Extraction. Note that stages 2 and 3 run in parallel, are on-the-fly, and exchange information, such that the automaton construction can be focused on critical states and early termination is possible. The improvements applied for SYNTCOMP 2019 and 2020 are described by Luttenberger et al (2020) and include a refined controller extraction stage or updates to the LTL-translations based upon (Esparza et al, 2020) provided by Owl (Kretínský et al, 2018). For SYNTCOMP 2021 the following major changes have been applied (Meyer and Sickert, 2021):

- LTL formulas are now translated to transition-based deterministic Emerson-Lei automata (tDELA) by combining constructions (Δ_2 -normalisation, direct translation to deterministic automata) from (Sickert and Esparza, 2020) with a product construction adapted from (Müller and Sickert, 2017). Then either a tDELA-to-tDPW construction based on Zielonka-trees or the Alternating Cycle Decomposition is applied (Casares et al (2021, 2022)).
- The strategy iteration algorithm by Luttenberger (2008) has been replaced by a Rust

implementation of the distraction fixpoint iteration algorithm (DFI) (van Dijk and Rubbens, 2019).

4.2 Otus

Otus (Abraham, 2021) is a tool for LTL synthesis using symbolically-represented parity automata and games. It proceeds as follows: the LTL formula is decomposed into a Boolean combination of *simpler* formulas, each of these formulas are separately translated to BDD-encoded deterministic automata, and then recomposed by computing the (deterministic) union and intersection on the BDD-representation. Concretely, **Otus** makes use of the Δ_2 -normalisation and the translation to deterministic (co-)Büchi automata found in (Sickert and Esparza, 2020) implemented by Owl (Kretínský et al, 2018), then computes the symbolic representation of a deterministic Rabin automaton by union and intersection, and then applies a symbolic implementation (Boker et al, 2010) to obtain a parity automaton. This symbolic automaton is reinterpreted as a parity game and a symbolic implementation of the distraction fix-point iteration (van Dijk and Rubbens, 2019; Lijzenga and van Dijk, 2020a) is applied. In order to speed up the BDD-operations, **Otus** makes use of the Sylvan BDD package (van Dijk and van de Pol, 2017).

4.3 BoWSer

BoWSer was updated by B. Finkbeiner and F. Klein. It implements different extensions of the *bounded synthesis* approach that solves the LTL synthesis problem by first translating the complement of the specification into a Büchi automaton, and then encoding acceptance of a transition system with bounded number of states into a constraint system, in this case a propositional satisfiability (SAT) problem. The details of all encodings are described in Finkbeiner and Klein (2016). Compared to 2017, a number of small improvements to speed up computations were implemented, and an experimental preprocessor to simplify LTL formulas has been added. The sequential configurations of the tool spawn multiple threads that are executed on a single CPU core. The parallel configurations are mostly the

Table 1 Links to tools and source code covered in this section

Strix	https://github.com/meyerphi/strix	subsection 4.1
Otus	https://doi.org/10.5281/zenodo.5046346	subsection 4.2
BoWSer	https://www.react.uni-saarland.de/tools/bowser/	subsection 4.3
BoSy	https://www.react.uni-saarland.de/tools/bosy/	subsection 4.4
LazySynt	https://github.com/mhdsakr/Lazy-Safety-Synthesis	subsection 4.6
Simple BDD Solver	https://github.com/adamwalker/syntcomp	subsection 4.5
Knor	https://github.com/trolando/knor	subsection 4.7
Party/Kid & sdf	https://github.com/5nizza/sdf-hoa	subsection 4.8
Ltlsynt	https://spot.lrde.epita.fr/ltlsynt.html	subsection 4.9
SPORE	https://github.com/Skar0/spore	subsection 4.10
Acacia bonsai	https://github.com/gaperez64/acacia-bonsai	subsection 4.11

same as the sequential ones, but use a slightly different strategy for exploring the search space of solutions.

4.4 BoSy

BoSy was updated by P. Faymonville, B. Finkbeiner and L. Tentrup, and competed in 2018 in both the realizability and the synthesis track. To detect realizability, BoSy translates the (complement of the) LTL specification into a safety automaton by bounding the number of visits to Büchi states. The resulting safety game is solved by SafetySynth. For synthesis, BoSy relies on an encoding into quantified Boolean formulas (QBF). A full account of the algorithms implemented in the tool is given by [Faymonville et al \(2017\)](#). Two configurations of BoSy competed in SYNTCOMP 2018: configuration (basic) and configuration (opt), where the latter further improves the size of the strategy by encoding the existence of an AIGER circuit representing the strategy directly into a QBF query. Both configurations support a parallel mode, if more than one core is available.

4.5 Simple BDD Solver

An update of Simple BDD Solver, submitted by Adam Walker, competed in the 2018 safety-realizability track. Simple BDD Solver implements the classical BDD-based fixpoint algorithm for safety games ([Jacobs et al, 2017b](#)). In sequential mode, it runs in three configurations, two of which are based on an abstraction-refinement approach inspired by [de Alfaro and Roy \(2010\)](#), and one without any abstraction. All three implement many important optimizations. These configurations are the same as in 2017. Additionally, three new configurations were entered for the parallel mode. These run different portfolios of the algorithms in the sequential mode.

4.6 LazySynt

The *Symbolic Lazy Synthesis* (LazySynt) tool was submitted in 2018 by M. Sakr and S. Jacobs. It participated hors concours in the safety-synthesis track. In contrast to the classical BDD-based algorithm and the SAT-based methods implemented in Demiurge ([Bloem et al, 2014](#); [Seidl and Könighofer, 2014](#)), LazySynt implements a combined forward-backward search that is embedded into a refinement loop, generating candidate solutions that are checked and refined with a combination of backward model checking and forward generation of additional constraints ([Jacobs and Sakr, 2021](#)).

4.7 Knor

Knor is a BDD-based solver for parity specifications. It leverages the Sylvan BDD package ([van Dijk and van de Pol, 2017](#)) and the Oink parity-game solver ([van Dijk, 2018](#)).

Knor implements a translation from HOA to a symbolic parity automaton encoded using BDDs. Importantly, the chosen variable ordering encodes first source states, then uncontrollable inputs, controllable inputs, and finally the target states. The resulting symbolic parity automaton can then be treated in two ways: First, it can be solved directly using a symbolic parity game algorithm ([Lijzenga and van Dijk, 2020b](#)) optimized to utilize the aforementioned variable ordering. This solution immediately yields a controller that can be dumped as an AIG. Alternatively, the symbolic parity automaton can be output as an explicit parity game. (Note that the previous encoding into BDDs might have reduced the size of the automaton, exponentially in some cases.) Such an explicit parity game can then be solved by any of the algorithms implemented in Oink. This last option does not yet support synthesis, only realizability.

For the first solution, synthesis is realized using a naïve construction of an AIG realizing the Mealy controller. There is a lot to be improved in the latter step as it is a simple application of the Shannon expansion of the BDD-encoded functions. Additionally, no preprocessing to improve the number of latches of the controller, i.e. the state space of the parity-game solution, is implemented.

For parity games derived from practical examples, the purely symbolic approach performs very well; for contrived artificial constructions, solving an explicit parity game in Oink is superior, though the choice of explicit algorithm makes a big difference.

4.8 Party/Kid and sdf

Party/Kid and `sdf` implement variants of symbolic bounded synthesis (Ehlers, 2011, 2010). Both tools run two tasks, realizability and unrealizability, in parallel. Below, we describe how the realizability check is done. Unrealizability can be checked in a similar fashion by adequately modifying the given LTL formula.

First, the tool translates the given LTL formula into a universal co-Büchi automaton (UCW) using the TLSF-manipulation tool `syfco` (Jacobs et al, 2016) and the Spot automata library (Duret-Lutz et al, 2016). Then, it iterates over increasing bounds on the number of visits to final states of the UCW: given such a bound, it translates the UCW into a universal safety automaton. The universal safety automaton is then encoded into a safety game in a BDD-based representation (using the CUDD library (Somenzi, 2005)), where each state of the universal automaton gets a separate variable in the BDDs, thus avoiding explicit determinization. The game is then solved using the standard fix-point algorithm. The strategy extraction is also standard and does not use any third-party tools.

Over the years 2017, 2018, 2021, three versions participated, with only technical differences. The latest version (`sdf`, 2021) is written in C++.

4.9 Ltlsynt

The program `ltlsynt`, introduced to SYNTCOMP in 2017 (see Table 2) is part of Spot (Duret-Lutz et al, 2016). It relies on a translation of the LTL specification to a parity game whose winning strategy is then encoded

as an AIGER circuit. The version submitted to the 2021 edition features the following improvements (Renkin et al, 2021):

- A decomposition of the input specification when possible (Finkbeiner et al, 2021).
- An LTL translation to Deterministic Emerson-Lei Automata (DELA) that handles various simplifications: splitting the input formula in a manner similar to the `delag` tool (Müller and Sickert, 2017), detecting *obligation* subformulas (Esparza et al, 2018), relying on weak automata and suspendable properties (Babiak et al, 2013).
- An SCC-based paritization algorithm (Renkin et al, 2020) for DELA that relies on a *color appearance record*.
- A transition-based parity game solver adapted from van Dijk (2018), supporting (non-recursive) SCC decomposition and parity compression.
- Optimization of the winning strategy through a variant of Spot’s simulation-based reduction based on BDD signatures or an improvement of a SAT-based minimization algorithm for Incompletely Specified Mealy Machines (Renkin et al, 2022).

4.10 SPORE

SPORE is a prototype tool designed to assess the viability of using generalized parity games for LTL realizability. The input LTL formula is first decomposed into a conjunction of sub-formulas, which are in turn translated into deterministic parity automata, composed into a synchronised (generalized parity) product automaton, and finally translated into a generalized parity game using the `tlsf2gpg`³ tool. The game is then solved using a combination of the recursive algorithm for generalized parity games (Chatterjee et al, 2007) and incomplete polynomial-time algorithms, called partial solvers, presented in Bruyère et al (2019). SPORE contains an explicit and a symbolic implementation of those algorithms, the latter relying on Binary Decision Diagrams (BDDs) to represent the game arena. The version presented in 2021 is implemented in Python with `dd`⁴ as a library to manipulate BDDs.

³See <https://github.com/gaperez64/tlsf2gpg>

⁴See <https://github.com/tulip-control/dd>

Table 2 Versions of Spot on which `ltsynt` submissions to SYNTCOMP were based.

Year	Version	Main changes in <code>ltsynt</code>
2017	pre-2.4	first implementation
2018	2.5.3	optimizations to determinization, and game solving; incremental determinization approach
2019	2.7.4	(bogus) LAR; improved LTL translation; incremental determinization removed
2020	2.9	reimplemented LAR, split, and game solving; parity minimization
2021	2.9.7	input decomposition; strategy simplification and specialized construction

4.11 Acacia bonsai

Acacia bonsai, the spiritual successor of Acacia+ (Bohy et al, 2012), participated hors concours in the 2021 edition of the LTL-realizability track. It implements *downset*-based algorithms that avoid constructing a deterministic automaton for the given LTL specification. Instead, the downsets are used to efficiently store sets of states in an on-the-fly determinization process. These algorithms were introduced by Filiot et al. in the 2010s and implemented in the tools Acacia and Acacia+ in C and Python (Bohy, 2014). Acacia bonsai is a complete rewrite of Acacia in C++20, articulated around genericity and leveraging modern techniques for better performance. These techniques include compile-time specialization of the algorithms, the use of SIMD registers to store vectors, and several preprocessing steps, some relying on efficient Binary Decision Diagram (BDD) libraries. It also includes different data structures to store downsets such as k-d trees.

It is worth mentioning that, to compile the input LTL formula into an automaton, Acacia bonsai uses Spot (Duret-Lutz et al, 2016).

5 Rankings and experiments

In this section we elaborate on the results of each track of the relevant editions of SYNTCOMP. All data used for the graphs and analyses given below can be fetched from <https://syntcomp.react.uni-saarland.de/> for the 2018 edition and <https://www.starexec.org/starexec/secure/explore/spaces.jsp?id=329383> for later editions.

5.1 Safety track

Despite the update submitted for the Simple BDD Solver tool, the tool rankings did not change in 2018 compared to 2017. We refer the interested reader to the SYNTCOMP'17 report (Jacobs et al, 2017a). In the following years, the safety track

has seen neither new participants nor updates to existing tools.

5.2 Parity track

In 2020 and 2021, two tools participated in the parity tracks: *Strix* and *Knor*. The former is, oversimplifying, the parity-game solving component of the tool *Strix* that is currently dominating the LTL track. *Knor* implements several classical and novel parity-game solving algorithms and combinations thereof. In 2020, both tools competed in the realizability track only. In 2021, they competed in the synthesis track only and in a special *combinatorially hard* realizability track. For these two initial editions of the parity tracks, no distinction was made between sequential and parallel subtracks.

The rankings are summarized in Table 3. Probably the most important insight from the results of these tracks is that *Knor*-BDD — which only participated hors concours in 2020, but later became the default configuration of *Knor* — outperformed both *Strix* and *Knor* by almost an order of magnitude only by switching to a symbolic representation of the input game.

5.3 LTL track

The LTL track has been running since 2016 and the set of (actively) participating tools has changed a bit since. In Figure 1, we depict the changes in the LTL-realizability rankings every year since 2017. Here, and in similar graphs shown in the rest of this article, we have selected the best configuration submitted per tool. Additionally, all tools — regardless of whether they were parallel or sequential — were assigned as score the number of benchmarks solved within the same time limits. It is noteworthy that the best tool in 2017 implemented bounded-synthesis algorithms, whereas in recent years the competition has been dominated by parity-game-based tools which focus on optimizing the LTL-to-automaton

Table 3 Rankings for the parity tracks of the 2020 and 2021 editions of SYNTCOMP

	Real. (2020)	Synth. (2021)	Qual. Rank (2021)	Hard Real (2021)
1st place	Strix	Knor-BDD	Strix	Knor-BDD
2nd place	Knor	Strix	Knor-BDD	Strix

compilation. Namely, **Strix** has remained first in all rankings since 2018.

Regarding 2021, in [Figure 2](#) we have plotted the total amount of time it takes for each tool to solve increasing numbers of benchmarks. Once more, we do not distinguish between parallel and sequential tools. For reference, we have also included Acacia bonsai in the plot, even if it only participated hors concours.

In what follows, we analyze the time and quality rankings of the tools in the synthesis subtrack of the 2018 and 2021 editions of SYNTCOMP. Note that from 2019 to 2020 only *ltsynt* and **Strix** participated, and they did so too in 2021, hence our choice of representative years. Additionally, we present the state of the art in terms of scalability for different parameterized families of benchmarks we have used for the competition.

5.3.1 Synthesis subtrack 2018, 2021

In [Figure 3](#) we have plotted, for each tool, the total amount of time it takes for it to solve increasing numbers of benchmarks. Here, we included configurations from previous years of tools which were updated and Party (as legacy tool) for reference. Additionally, both realizable and unrealizable benchmarks were counted for the score. The previous results should be compared with [Figure 4](#), where we have plotted the total size of the outputs generated for increasing numbers of (realizable) benchmarks.

5.3.2 Parameterized families of benchmarks

Presently, we focus on families of LTL specifications defined by TLSF benchmarks with parameters. In 2021, LTL specifications coming from 26 such TLSF files were used in the competition. For most of those families, the results are consistent with the previously summarized results, i.e., the rankings of the tools are preserved when restricting the score to solved benchmarks in that set only. However, some exceptions do exist.

For instance, the families of combinatorial logic specifications *mux* and *shift*, which specify transducers realizing a multiplexer and a barrel shifter, respectively, are solved most efficiently by tools other than **Strix**. See [Figure 5](#) for the relevant plots. Other exceptions include the *collector_v2* and *detector* families of benchmarks, see [Figure 6](#). For the former, the (total) solving time for the best tool is more than order of magnitude smaller than that of **Strix**. Other interesting families include arbiter specifications such as the *round_robin_arbiter* and the *full_arbiter* families. There, **Strix** is still best overall, but not consistently so, see [Figure 7](#).

6 Conclusion

In this article we have reported on the last four editions of SYNTCOMP, the reactive synthesis competition. Furthermore, we analyzed the results of our experimental evaluations, including a ranking of the participating tools with respect to quantity and quality of solutions. We observe a measurable improvement in terms of the performance of the top solvers in each track. Additionally, the number of collected benchmarks continues to grow.

In future editions, we will try to replicate the success of the new parity track. Indeed, several teams submitting solvers to it eventually ended up extending their tool to participate in the LTL tracks as well. Finally, we will also update some of the rules of the competition so that it remains interesting to the community.

Changes to rules

Starting with the 2022 edition of the competition, the following changes will be implemented:

Benchmark copyright. All submitted benchmarks will be made publicly available via our repository⁵ under a CC-BY license.

⁵Currently hosted here: <https://github.com/SYNTCOMP/benchmarks>

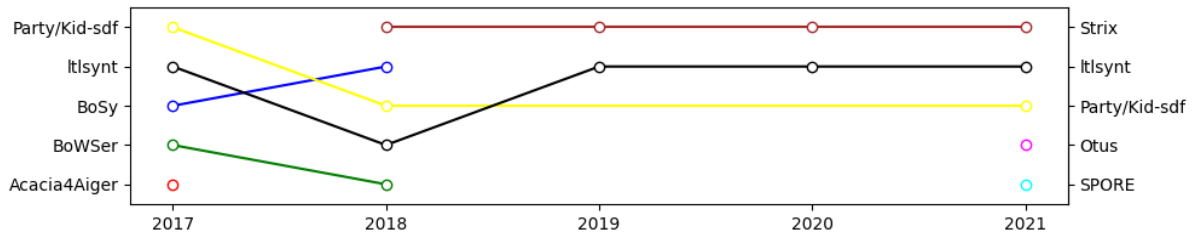


Fig. 1 Bump plot of the rankings for the LTL realizability tracks for all editions of SYNTCOMP 2017–2021 (2017 included for reference since some tools are no longer actively participating)

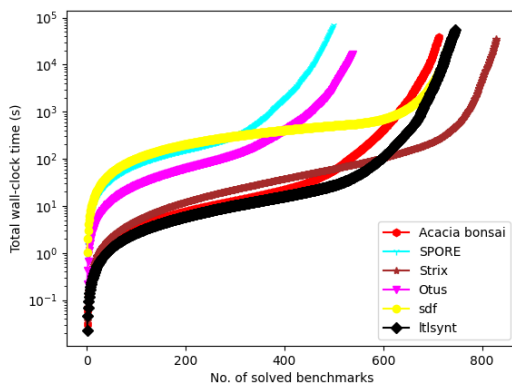


Fig. 2 Cactus (a.k.a. survival) plots for the participants of the LTL realizability track of SYNTCOMP 2021; Note that the y-axis is displayed using logarithmic scale

Parallel tracks. We will no longer differentiate between tool submissions to sequential and parallel tracks. Instead, we will make this distinction in the rankings by basing it on the wallclock time and user-CPU time used by the tools per benchmark. Regarding concrete time limits, all tools will be allowed 10.000s wall-clock time and 4×10.000 s user-CPU time since each *job pair* ran on StarExec has access to one 4-core CPU.

StarExec. For the next 3–5 years, at least, we will continue using StarExec to host the competition. We will follow its evolution in terms of hardware and will later revisit the question of whether alternative (locally hosted) frameworks better fit the needs of the competition and the community.

References

- Abraham R (2021) Symbolic LTL reactive synthesis. URL <http://essay.utwente.nl/87386/>
- de Alfaro L, Roy P (2010) Solving games via three-valued abstraction refinement. *Inf Comput* 208(6):666–676. <https://doi.org/10.1016/j.ic.2009.05.007>, URL <https://doi.org/10.1016/j.ic.2009.05.007>
- Babiak T, Badie T, Duret-Lutz A, et al (2013) Compositional approach to suspension and other improvements to LTL translation. In: Proceedings of the 20th International SPIN Symposium on Model Checking of Software (SPIN’13), Lecture Notes in Computer Science, vol 7976. Springer, pp 81–98, https://doi.org/10.1007/978-3-642-39176-7_6
- Babiak T, Blahoudek F, Duret-Lutz A, et al (2015) The hanoi omega-automata format. In: Kroening D, Pasareanu CS (eds) Computer Aided Verification - 27th International Conference, CAV 2015, San Francisco, CA, USA, July 18–24, 2015, Proceedings, Part I, Lecture Notes in Computer Science, vol 9206. Springer, pp 479–486, https://doi.org/10.1007/978-3-319-21690-4_31, URL https://doi.org/10.1007/978-3-319-21690-4_31
- Baier C, Katoen J (2008) Principles of model checking. MIT Press
- Balint A, Diepold D, Gall D, et al (2011) EDACC - an advanced platform for the experiment design, administration and analysis of empirical algorithms. In: Coello CAC (ed) Learning and Intelligent Optimization - 5th International Conference, LION 5, Rome, Italy, January 17–21, 2011. Selected Papers, Lecture Notes in Computer Science, vol 6683. Springer, pp 586–599, https://doi.org/10.1007/978-3-642-25566-3_46, URL https://doi.org/10.1007/978-3-642-25566-3_46

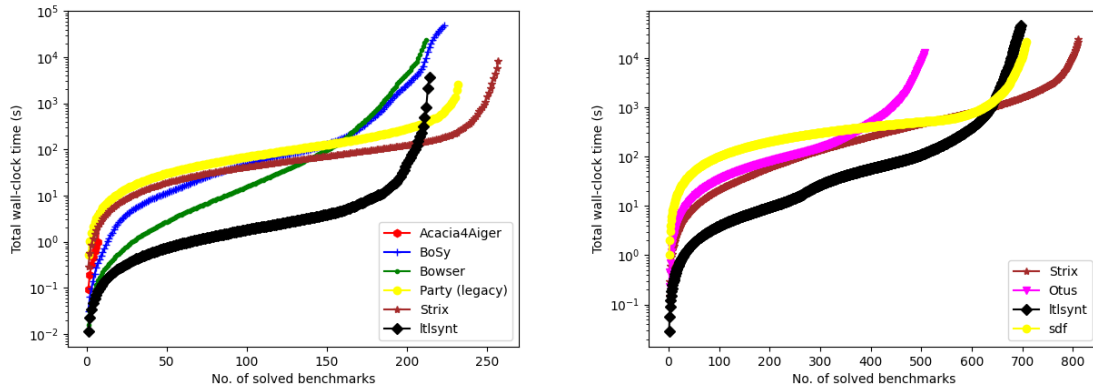


Fig. 3 Cactus (a.k.a. survival) plots for the participants of the LTL synthesis track of SYNTCOMP 2018 (left) and 2021 (right); Again, the y-axis is displayed using logarithmic scale

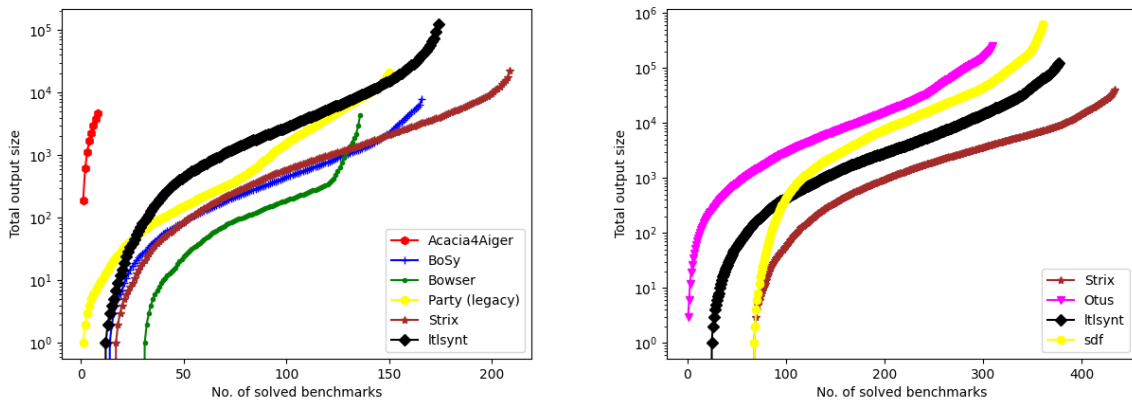


Fig. 4 Cactus plots for the participants of the LTL synthesis track of SYNTCOMP 2018 (left) and 2021 (right) — this time, showing total output size instead of time (counting AND-gates only); Note that the y-axis is displayed using logarithmic scale

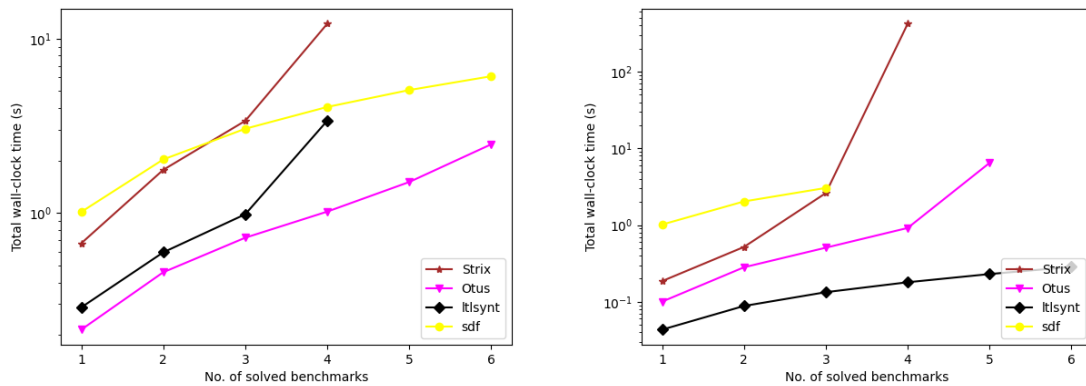


Fig. 5 Cactus plots for all the participants of the LTL synthesis track of SYNTCOMP 2021, restricted to the mux (left) and shift (right) benchmark families

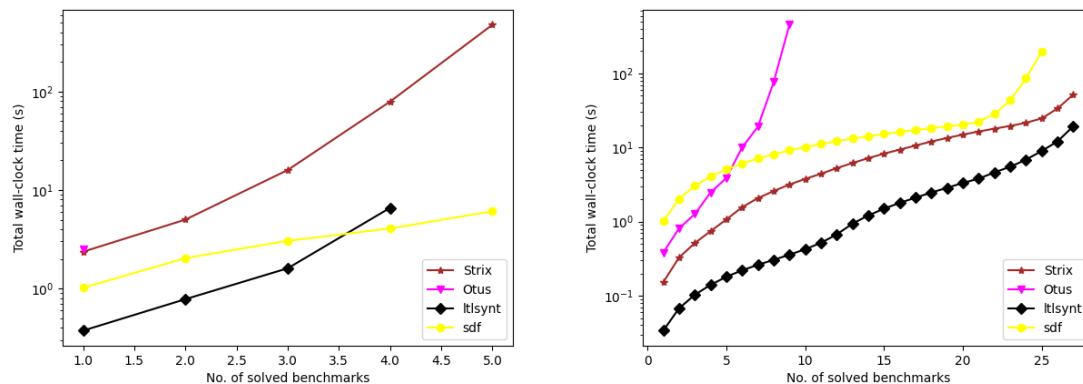


Fig. 6 Cactus plots for all the participants of the LTL synthesis track of SYNTCOMP 2021, restricted to the `collector_v2` (left) and `detector` (right) benchmark families

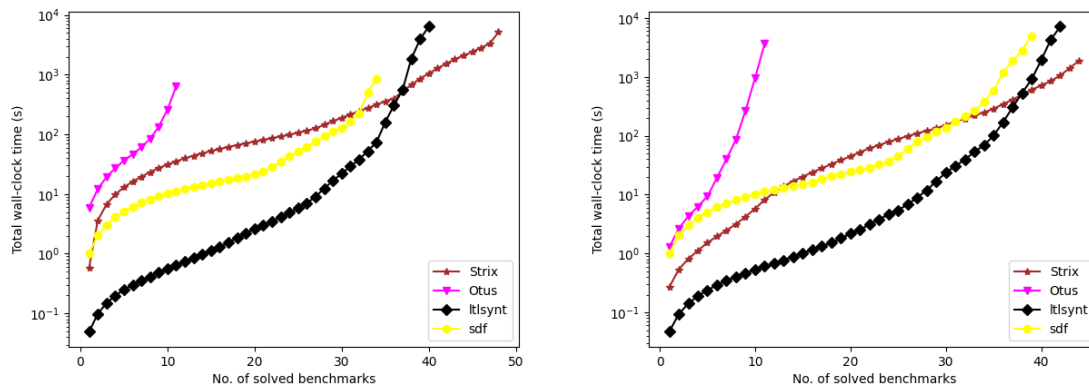


Fig. 7 Cactus plots for all the participants of the LTL synthesis track of SYNTCOMP 2021, restricted to the `round_robin_arbiter` (left) and `full_arbiter` (right) benchmark families

Biere A (2007) Hardware model checking competition. <http://fmv.jku.at/hwmcc/>

Biere A (2011) Aiger format and toolbox. <http://fmv.jku.at/aiger/>

Bloem R, Könighofer R, Seidl M (2014) Sat-based synthesis methods for safety specs. In: McMillan KL, Rival X (eds) Verification, Model Checking, and Abstract Interpretation - 15th International Conference, VMCAI 2014, San Diego, CA, USA, January 19-21, 2014, Proceedings, Lecture Notes in Computer Science, vol 8318. Springer, pp 1–20, https://doi.org/10.1007/978-3-642-54013-4_1, URL https://doi.org/10.1007/978-3-642-54013-4_1

Bohy A (2014) Antichain based algorithms for the synthesis of reactive systems. PhD thesis, University of Mons

Bohy A, Bruyère V, Filiot E, et al (2012) Acacia+, a tool for LTL synthesis. In: Madhusudan P, Seshia SA (eds) CAV, LNCS, vol 7358. Springer, pp 652–657, https://doi.org/10.1007/978-3-642-31424-7_45, URL https://doi.org/10.1007/978-3-642-31424-7_45

Boker U, Kupferman O, Steinitz A (2010) Parityzing rabin and streett. In: Lodaya K, Mahajan M (eds) IARCS Annual Conference on Foundations of Software Technology and Theoretical Computer Science, FSTTCS 2010, December 15-18, 2010, Chennai, India, LIPIcs,

- vol 8. Schloss Dagstuhl - Leibniz-Zentrum für Informatik, pp 412–423, <https://doi.org/10.4230/LIPIcs.FSTTCS.2010.412>, URL <https://doi.org/10.4230/LIPIcs.FSTTCS.2010.412>
- Bruyère V, Pérez GA, Raskin J, et al (2019) Partial solvers for generalized parity games. In: Filiot E, Jungers RM, Potapov I (eds) Reachability Problems - 13th International Conference, RP 2019, Brussels, Belgium, September 11-13, 2019, Proceedings, Lecture Notes in Computer Science, vol 11674. Springer, pp 63–78, https://doi.org/10.1007/978-3-030-30806-3_6, URL https://doi.org/10.1007/978-3-030-30806-3_6
- Casares A, Colcombet T, Fijalkow N (2021) Optimal transformations of games and automata using muller conditions. In: Bansal N, Merelli E, Worrell J (eds) 48th International Colloquium on Automata, Languages, and Programming, ICALP 2021, July 12-16, 2021, Glasgow, Scotland (Virtual Conference), LIPIcs, vol 198. Schloss Dagstuhl - Leibniz-Zentrum für Informatik, pp 123:1–123:14, <https://doi.org/10.4230/LIPIcs.ICALP.2021.123>, URL <https://doi.org/10.4230/LIPIcs.ICALP.2021.123>
- Casares A, Duret-Lutz A, Meyer KJ, et al (2022) Practical applications of the alternating cycle decomposition. In: Fisman D, Rosu G (eds) Tools and Algorithms for the Construction and Analysis of Systems - 28th International Conference, TACAS 2022, Held as Part of the European Joint Conferences on Theory and Practice of Software, ETAPS 2022, Munich, Germany, April 2-7, 2022, Proceedings, Part II, Lecture Notes in Computer Science, vol 13244. Springer, pp 99–117, https://doi.org/10.1007/978-3-030-99527-0_6, URL https://doi.org/10.1007/978-3-030-99527-0_6
- Chatterjee K, Henzinger TA, Piterman N (2007) Generalized parity games. In: Seidl H (ed) Foundations of Software Science and Computational Structures, 10th International Conference, FOSSACS 2007, Held as Part of the Joint European Conferences on Theory and Practice of Software, ETAPS 2007, Braga, Portugal, March 24-April 1, 2007, Proceedings, Lecture Notes in Computer Science, vol 4423. Springer, pp 153–167, https://doi.org/10.1007/978-3-540-71389-0_12, URL https://doi.org/10.1007/978-3-540-71389-0_12
- Church A (1957) Application of Recursive Arithmetic to the Problem of Circuit Synthesis, Summaries of the Summer Institute of Symbolic Logic, vol 1, American Mathematical Society, pp 3–50
- Church A (1964) Logic, arithmetic, and automata. *Journal of Symbolic Logic* 29(4)
- Clarke EM, Henzinger TA, Veith H, et al (eds) (2018) Handbook of Model Checking. Springer, <https://doi.org/10.1007/978-3-319-10575-8>, URL <https://doi.org/10.1007/978-3-319-10575-8>
- van Dijk T (2018) Oink: An implementation and evaluation of modern parity game solvers. In: Proceedings of the 24th International Conference on Tools and Algorithms for the Construction and Analysis of Systems (TACAS'18), Springer, pp 291–308, https://doi.org/10.1007/978-3-319-89960-2_16
- van Dijk T, van de Pol J (2017) Sylvan: multi-core framework for decision diagrams. *Int J Softw Tools Technol Transf* 19(6):675–696. <https://doi.org/10.1007/s10009-016-0433-2>, URL <https://doi.org/10.1007/s10009-016-0433-2>
- van Dijk T, Rubbens B (2019) Simple fixpoint iteration to solve parity games. In: Leroux J, Raskin J (eds) Proceedings Tenth International Symposium on Games, Automata, Logics, and Formal Verification, GandALF 2019, Bordeaux, France, 2-3rd September 2019, pp 123–139, <https://doi.org/10.4204/EPTCS.305.9>, URL <https://doi.org/10.4204/EPTCS.305.9>
- Duret-Lutz A, Lewkowicz A, Fauchille A, et al (2016) Spot 2.0 — a framework for LTL and ω -automata manipulation. In: Proceedings of the 14th International Symposium on Automated Technology for Verification and Analysis (ATVA'16), Lecture Notes in Computer Science, vol 9938. Springer, pp 122–129, https://doi.org/10.1007/978-3-319-46520-3_8

- Ehlers R (2010) Symbolic bounded synthesis. In: International conference on computer aided verification, Springer, pp 365–379
- Ehlers R (2011) Unbeast: Symbolic bounded synthesis. In: International Conference on Tools and Algorithms for the Construction and Analysis of Systems, Springer, pp 272–275
- Esparza J, Křetínský J, Sickert S (2018) One theorem to rule them all: A unified translation of LTL into ω -automata. In: Dawar A, Grädel E (eds) Proceedings of the 33rd Annual ACM/IEEE Symposium on Logic in Computer Science (LICS'18). ACM, pp 384–393, <https://doi.org/10.1145/3209108.3209161>
- Esparza J, Křetínský J, Sickert S (2020) A unified translation of linear temporal logic to ω -automata. *J ACM* 67(6):33:1–33:61. <https://doi.org/10.1145/3417995>, URL <https://doi.org/10.1145/3417995>
- Faymonville P, Finkbeiner B, Tentrup L (2017) Bosy: An experimentation framework for bounded synthesis. In: Majumdar R, Kuncak V (eds) Computer Aided Verification - 29th International Conference, CAV 2017, Heidelberg, Germany, July 24–28, 2017, Proceedings, Part II, Lecture Notes in Computer Science, vol 10427. Springer, pp 325–332, https://doi.org/10.1007/978-3-319-63390-9_17, URL https://doi.org/10.1007/978-3-319-63390-9_17
- Finkbeiner B, Klein F (2016) Bounded cycle synthesis. In: Chaudhuri S, Farzan A (eds) Computer Aided Verification - 28th International Conference, CAV 2016, Toronto, ON, Canada, July 17–23, 2016, Proceedings, Part I, Lecture Notes in Computer Science, vol 9779. Springer, pp 118–135, https://doi.org/10.1007/978-3-319-41528-4_7, URL https://doi.org/10.1007/978-3-319-41528-4_7
- Finkbeiner B, Klein F, Piskac R, et al (2019a) Synthesizing functional reactive programs. In: Eisenberg RA (ed) Proceedings of the 12th ACM SIGPLAN International Symposium on Haskell, Haskell@ICFP 2019, Berlin, Germany, August 18–23, 2019. ACM, pp 162–175, <https://doi.org/10.1145/3331545.3342601>, URL <https://doi.org/10.1145/3331545.3342601>
- Finkbeiner B, Klein F, Piskac R, et al (2019b) Temporal stream logic: Synthesis beyond the booleans. In: Dillig I, Tasiran S (eds) Computer Aided Verification - 31st International Conference, CAV 2019, New York City, NY, USA, July 15–18, 2019, Proceedings, Part I, Lecture Notes in Computer Science, vol 11561. Springer, pp 609–629, https://doi.org/10.1007/978-3-030-25540-4_35, URL https://doi.org/10.1007/978-3-030-25540-4_35
- Finkbeiner B, Geier G, Passing N (2021) Specification decomposition for reactive synthesis. In: Proceedings for the 13th NASA Formal Methods Symposium (NFM'21), https://doi.org/10.1007/978-3-030-76384-8_8
- Friedmann O, Lange M (2009) Solving parity games in practice. In: Liu Z, Ravn AP (eds) Automated Technology for Verification and Analysis, 7th International Symposium, ATVA 2009, Macao, China, October 14–16, 2009. Proceedings, Lecture Notes in Computer Science, vol 5799. Springer, pp 182–196, https://doi.org/10.1007/978-3-642-04761-9_15, URL https://doi.org/10.1007/978-3-642-04761-9_15
- Geier G, Heim P, Klein F, et al (2019) Syntroids: Synthesizing a game for FPGAs using temporal logic specifications. In: Barrett CW, Yang J (eds) 2019 Formal Methods in Computer Aided Design, FMCAD 2019, San Jose, CA, USA, October 22–25, 2019. IEEE, pp 138–146, <https://doi.org/10.23919/FMCAD.2019.8894261>, URL <https://doi.org/10.23919/FMCAD.2019.8894261>
- Jacobs S (2014) Extended AIGER format for synthesis. CoRR abs/1405.5793. URL <http://arxiv.org/abs/1405.5793>, <https://arxiv.org/abs/1405.5793>
- Jacobs S, Sakr M (2021) AIGEN: random generation of symbolic transition systems. In: Silva A, Leino KRM (eds) Computer Aided Verification - 33rd International Conference, CAV 2021, Virtual Event, July 20–23, 2021, Proceedings, Part II, Lecture Notes in Computer Science, vol 12760. Springer, pp 435–446, https://doi.org/10.1007/978-3-030-81688-9_20, URL https://doi.org/10.1007/978-3-030-81688-9_20

- Jacobs S, Klein F, Schirmer S (2016) A high-level LTL synthesis format: TLSF v1.1. In: Piskac R, Dimitrova R (eds) Proceedings Fifth Workshop on Synthesis, SYNT@CAV 2016, Toronto, Canada, July 17-18, 2016, pp 112–132, <https://doi.org/10.4204/EPTCS.229.10>, URL <https://doi.org/10.4204/EPTCS.229.10>
- Jacobs S, Basset N, Bloem R, et al (2017a) The 4th reactive synthesis competition (SYNTCOMP 2017): Benchmarks, participants & results. In: Fisman D, Jacobs S (eds) Proceedings Sixth Workshop on Synthesis, SYNT@CAV 2017, Heidelberg, Germany, 22nd July 2017, pp 116–143, <https://doi.org/10.4204/EPTCS.260.10>, URL <https://doi.org/10.4204/EPTCS.260.10>
- Jacobs S, Bloem R, Brenguier R, et al (2017b) The first reactive synthesis competition (SYNTCOMP 2014). *Int J Softw Tools Technol Transf* 19(3):367–390. <https://doi.org/10.1007/s10009-016-0416-3>, URL <https://doi.org/10.1007/s10009-016-0416-3>
- Kretínský J, Meggendorfer T, Sickert S (2018) Owl: A library for ω -words, automata, and LTL. In: Lahiri SK, Wang C (eds) Automated Technology for Verification and Analysis - 16th International Symposium, ATVA 2018, Los Angeles, CA, USA, October 7-10, 2018, Proceedings, Lecture Notes in Computer Science, vol 11138. Springer, pp 543–550, https://doi.org/10.1007/978-3-030-01090-4_34, URL https://doi.org/10.1007/978-3-030-01090-4_34
- Lijzenga O, van Dijk T (2020a) Symbolic parity game solvers that yield winning strategies. In: Raskin J, Bresolin D (eds) Proceedings 11th International Symposium on Games, Automata, Logics, and Formal Verification, GandALF 2020, Brussels, Belgium, September 21-22, 2020, pp 18–32, <https://doi.org/10.4204/EPTCS.326.2>, URL <https://doi.org/10.4204/EPTCS.326.2>
- Lijzenga O, van Dijk T (2020b) Symbolic parity game solvers that yield winning strategies. In: Raskin J, Bresolin D (eds) Proceedings 11th International Symposium on Games, Automata, Logics, and Formal Verification, GandALF 2020, Brussels, Belgium, September 21-22, 2020, pp 18–32, <https://doi.org/10.4204/EPTCS.326.2>, URL <https://doi.org/10.4204/EPTCS.326.2>
- Luttenberger M (2008) Strategy iteration using non-deterministic strategies for solving parity games. *CoRR* abs/0806.2923. URL <http://arxiv.org/abs/0806.2923>, <https://arxiv.org/abs/arXiv:0806.2923>
- Luttenberger M, Meyer PJ, Sickert S (2020) Practical synthesis of reactive systems from LTL specifications via parity games. *Acta Informatica* 57(1-2):3–36. <https://doi.org/10.1007/s00236-019-00349-3>, URL <https://doi.org/10.1007/s00236-019-00349-3>
- Meyer PJ, Sickert S (2021) Modernising strix. Presented at the 10th Workshop on Synthesis
- Meyer PJ, Sickert S, Luttenberger M (2018) Strix: Explicit reactive synthesis strikes back! In: Chockler H, Weissenbacher G (eds) Computer Aided Verification - 30th International Conference, CAV 2018, Held as Part of the Federated Logic Conference, FloC 2018, Oxford, UK, July 14-17, 2018, Proceedings, Part I, Lecture Notes in Computer Science, vol 10981. Springer, pp 578–586, https://doi.org/10.1007/978-3-319-96145-3_31, URL https://doi.org/10.1007/978-3-319-96145-3_31
- Müller D, Sickert S (2017) LTL to deterministic Emerson-Lei automata. In: Bouyer P, Orlandini A, Pietro PS (eds) Proceedings of the Eighth International Symposium on Games, Automata, Logics and Formal Verification (GandALF'17), pp 180–194, <https://doi.org/10.4204/EPTCS.256.13>
- Pérez GA (2019) The extended HOA format for synthesis. *CoRR* abs/1912.05793. URL <http://arxiv.org/abs/1912.05793>, <https://arxiv.org/abs/1912.05793>
- Piterman N (2007) From nondeterministic büchi and streett automata to deterministic parity automata. *Log Methods Comput Sci* 3(3). [https://doi.org/10.2168/LMCS-3\(3:5\)2007](https://doi.org/10.2168/LMCS-3(3:5)2007), URL [https://doi.org/10.2168/LMCS-3\(3:5\)2007](https://doi.org/10.2168/LMCS-3(3:5)2007)

- Pnueli A (1977) The temporal logic of programs. In: 18th Annual Symposium on Foundations of Computer Science, Providence, Rhode Island, USA, 31 October - 1 November 1977. IEEE Computer Society, pp 46–57, <https://doi.org/10.1109/SFCS.1977.32>, URL <https://doi.org/10.1109/SFCS.1977.32>
- Renkin F, Duret-Lutz A, Pommellet A (2020) Practical “paritizing” of Emerson-Lei automata. In: Proceedings of the 18th International Symposium on Automated Technology for Verification and Analysis (ATVA’20), Lecture Notes in Computer Science, vol 12302. Springer, pp 127–143, https://doi.org/10.1007/978-3-030-59152-6_7
- Renkin F, Schlehuber P, Duret-Lutz A, et al (2021) Improvements to `ltlsynt`. Presented at the 10th Workshop on Synthesis, URL <https://hal.archives-ouvertes.fr/hal-03523385>
- Renkin F, Schlehuber-Caissier P, Duret-Lutz A, et al (2022) Effective reductions of Mealy machines. In: Proceedings of the 42nd International Conference on Formal Techniques for Distributed Objects, Components, and Systems (FORTE’22). Springer, Lecture Notes in Computer Science, to appear
- Safra S (1988) On the complexity of omega-automata. In: 29th Annual Symposium on Foundations of Computer Science, White Plains, New York, USA, 24–26 October 1988. IEEE Computer Society, pp 319–327, <https://doi.org/10.1109/SFCS.1988.21948>, URL <https://doi.org/10.1109/SFCS.1988.21948>
- Seidl M, Könighofer R (2014) Partial witnesses from preprocessed quantified boolean formulas. In: Fettweis GP, Nebel W (eds) Design, Automation & Test in Europe Conference & Exhibition, DATE 2014, Dresden, Germany, March 24–28, 2014. European Design and Automation Association, pp 1–6, <https://doi.org/10.7873/DATE.2014.162>, URL <https://doi.org/10.7873/DATE.2014.162>
- Sickert S, Esparza J (2020) An efficient normalisation procedure for linear temporal logic and very weak alternating automata. In: Hermanns H, Zhang L, Kobayashi N, et al (eds) LICS ’20: 35th Annual ACM/IEEE Symposium on Logic in Computer Science, Saarbrücken, Germany, July 8–11, 2020. ACM, pp 831–844, <https://doi.org/10.1145/3373718.3394743>, URL <https://doi.org/10.1145/3373718.3394743>
- Somenzi F (2005) CUDD package, release 2.4.1. <http://vlsi.colorado.edu/~fabio/CUDD/>
- Stump A, Sutcliffe G, Tinelli C (2014) Starexec: A cross-community infrastructure for logic solving. In: Demri S, Kapur D, Weidenbach C (eds) Automated Reasoning - 7th International Joint Conference, IJCAR 2014, Held as Part of the Vienna Summer of Logic, VSL 2014, Vienna, Austria, July 19–22, 2014. Proceedings, Lecture Notes in Computer Science, vol 8562. Springer, pp 367–373, https://doi.org/10.1007/978-3-319-08587-6_28, URL https://doi.org/10.1007/978-3-319-08587-6_28
- Vardi MY, Wolper P (1984) Automata theoretic techniques for modal logics of programs (extended abstract). In: DeMillo RA (ed) Proceedings of the 16th Annual ACM Symposium on Theory of Computing, April 30 - May 2, 1984, Washington, DC, USA. ACM, pp 446–456, <https://doi.org/10.1145/800057.808711>, URL <https://doi.org/10.1145/800057.808711>